



26", 32", 42" Premium **Wide Series**

Product Features

- ; 26" / 32" / 42" Wide CCTV TFT LCD Monitor
- ; Metal Cabinet
- ; Mask Killer to Prevent Image Retention
- ; Adaptive 3D Comb Filter and 3D De-interlace Technology
- ; NTSC / PAL Auto Recognition
- ; PIP and POP Multi Display Function
- ; 6 Scanning Types: Over, Under, Full, 1:1, 4:3, 16:9
- ; OSD Multi-language Support
- ; DC 12V Power Output Supplies Power for a Single Camera
- ; Optional Wall Mount Kit and Stand Base



GM26/GM32/GM42

Accessory

26", 32", 42" Wide CCTV LCD
Monitor (Metal)



Wall Mount Kit
S2601 (for 26")



Wall Mount Kit
S3201 (for 32", 42")



L-Shape Stand
B2601 (for 26", 32", 42")


Specification

Model		GM26	GM32	GM42
LCD Display		26" Active Matrix TFT LCD	32" Active Matrix TFT LCD	42" Matrix Active TFT LCD
Viewable Size		575.769mm (H) x 323.712mm (V)	697.685mm (H) x 392.256mm (V)	930.24mm (H) x 523.26mm (V)
Pixel Pitch		0.4215(H) x 0.4215(V) mm	0.51075(H) x 0.51075(V) mm	0.4845(H) x 0.4845(V) mm
Resolution		550TVL / 1366 x 768 (WXGA)	550TVL / 1366 x 768 (WXGA)	550TVL/ 1366 x 768(WXGA)
Contrast Ratio		3000:1	3000:1	3500:1
Brightness		450 cd/m ² (TYP.)	450 cd/m ² (TYP.)	700 cd/m ² (TYP.)
Response Time Tr/Tf		6.5 ms	6.5 ms	6.5ms
Display color		16.7M	16.7M	16.7M
Viewing Angle L/R		89° / 89° (TYP.)	89° / 89° (TYP.)	L:178° , R:178° (TYP.)
Viewing Angle U/D		89° / 89° (TYP.)	89° / 89° (TYP.)	L:178° , R:178° (TYP.)
Lamp Life Time		50,000 hrs	50,000 hrs	60,000 hrs(min.)
Scan Frequency	Horizontal	31.469KHz ~ 79.976KHz	31.469KHz ~ 79.976KHz	31.469KHz ~ 79.976KHz
	Vertical	56.25Hz ~ 75.029Hz	56.25Hz ~ 75.029Hz	56.25Hz ~ 75.029Hz
Scanning Type		Over, Under, Full, 1:1, 4:3, 16:9		
PIP & POP		Yes		
3D Comb Filter		Yes		
3D De-interlace		Yes		
OSD Language		English, Traditional Chinese, Simplified Chinese, French, German, Spanish, Italian, Portuguese, Russian, Japanese		
Display Mode		VGA, DVI, Composite 1, Composite 2, S-Video, YPbPr, HDMI(Optional)		
Signal Connector	Input	BNC x 2, S-Video x 1, VGA (15 Pin D-Sub) x 1, DVI x 1, YPbPr x 1, HDMI x 1(Optional)		
	Output	BNC x 2, S-Video x 1		
Audio Connector	Input	RCA Audio x 4, PC Audio x 1		
	Output	RCA Audio x 4		
Audio Speaker		5W x 2		
Remote control		Yes		
Cabinet Material/Color		Black/Metal		
Power Input		AC100V~240V 50/60Hz		
Power Consumption		80W(Max.)	100W(Max.)	250W(Max.)
Power Management		VESA DPMS Standard		
Operating Condition		Temp: 0°C~40°C		
Storage Condition		Temp: -20°C~60°C		
Net Weight (KGS)		11.42kgs	19.5kgs	30kgs
Gross Weight (KGS)		17.26kgs	26kgs	38kgs
Dimension (WxHxD)		634 x 390.3 x 119.5mm	769.0 x 467.4 x 110.7mm	993.2 x 596.7 x 125.8mm
Package Dimension (WxHxD)		755.0 x 655.0 x 225.0mm	921.0 x 610.0 x 235.0mm	1120.0 x 780.0 x 270.0mm
Safety		CE, FCC, UL, CB, C-TICK		

*Specifications subject to change without notice.

2010.7.28

Dimension

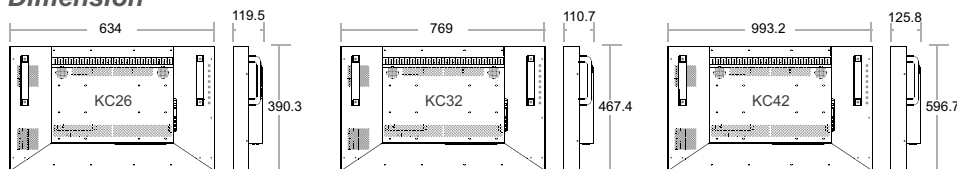

Australian Distributor:

Goodson Imports P/L

142 Wicks Road

North Ryde, Sydney NSW 2113

Sales Office and Warehouse in Melbourne, Brisbane, Adelaide, Perth and Auckland New Zealand


Ph 02-8875 4544

Fax 02-8875 4588

www.goodson.com.au


unit: mm

Function Panel



I/O Connectivity

Bottom

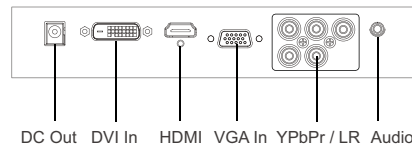

Side

