



NEC MultiSync® X461UNV

Preliminary



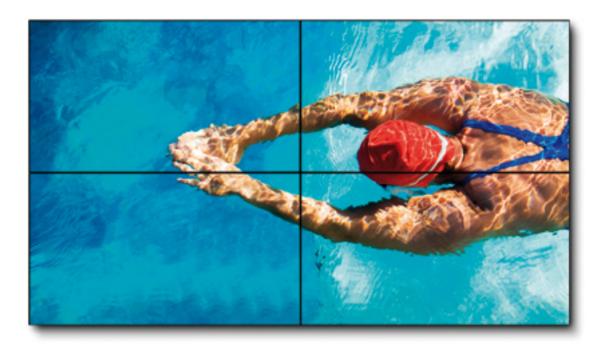



- 46" public display with 450cd brightness
- Ambient light sensor for optimized brightness levels and minimized power consumption
- Factory and user calibration for perfect brightness and color uniformity
- Option slot for Buillt-In PC, DVI Daisy chain and other boards



NEC MultiSync® X461UNV

TECHNICAL SPECIFICATIONS

Panel Technology	S-PVA TFT
Active Screen Area (W x H) [mm]	1018.4 x 572.5
Screen Size [inch/cm]	46 / 117
Pixel Pitch [mm]	0.746 x 0.746
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Screen Aspect Ratio	16:9
Contrast Ratio (typ.)	3000:1
Brightness (typ.) [cd/m²]	450
Response Time (typ.) [ms]	8 (grey-to-grey), 16 (6 white / black; 10 black / white), 8 (tr - tf)
Colours [Mio.]	16.77
Horizontal Frequency [kHz]	31.5 - 91.1 (analog and digital)
Vertical Frequency [Hz]	50 - 85
Optimum Resolution	1360 x 768 at 60 Hz
Native Resolution	1366 x 768 at 60 Hz
Supported Resolutions	1920 x 1080; 1680 x 1050; 1600 x 1200; 1440 x 1050; 1366 x 768; 1280 x 1024; 1280 x 768;
	1024 x 768; 832 x 624; 800 x 600; 720 x 400; 640 x 480
Video Input	Analog: 1 x S-Video; Analog: 5 x BNC, Component, Composite (via BNC and Cinch); Analog: 1 x D-
151 01 1	sub 15 pin; Digital: 1 x DVI-D (with HDCP); Digital: 1 x HDMl 1.3; Digital: 1 x DisplayPort
Video Output	Analog: 5 x BNC, Composite (via BNC)
Audio Input	2 x Cinch (RCA); 1 x Head-jack 3.5 mm
Audio Output	1 x Cinch (RCA)
Option Slot	Media Player; Built-in PC; DVI daisy chain board; HD-SDI board; CAT 5 receiver
Plug & Play	VESA DDC2Bi
Safety and Ergonomics	CE; TÜV GS; C-tick; Energy Star 5.0; FCC Class B; UL/C-UL or CSA; CCC; PSB; VCCI; RoHS
Power Consumption on Mode [W]	000 (at 450 cd/m2) (typ.); 000W max. (with speakers and built-in PC 100% workload)
Power Management	VESA DPMS
Power Supply	100-120 V/220-240 V; 3.6 A/1.45 A; internal power supply
Ambient Temperature (operating) [°C]	+5 to +40
Ambient Humidity (operating) [%]	20 to 80
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes
Dimensions (W x H x D) [mm]	With stand: 1025.7 x 623.6 x 351 Without stand: 1025.7 x 579.8 x 128.1
Bezel Width [mm]	2.4 bottom/right; 4.3 top/left; (Content to content: 2.7 bottom/right; 4.6 top/left)
Weight [kg]	With stand: 000
Benefits	10 bit LUT for calibration; 10 x 10 Tile Matrix with up 100 IDs through RS232; copy display settings
Delicitis	through RS232; external ambient light + IR sensor; LAN control through free NEC software;
	NaViSet®and NaViSet®Administrator compatible; OmniColor™: sRGB and 6-Axis-Colour-Control;
	SNMP LAN; TileMatrix; TileMatrix per input; user controllable back up fans with 2 speeds
Supported TV Standards (no tuner)	SECAM; PAL; NTSC
Video Modes (no tuner)	480j; 480p; 576j; 576p; 2 x720p (50 and 60 Hz); 2 x 1080j (50 and 60 Hz); 2 x 1080p (50 and 60
	Hz)
Audio Functions	no optional speakers; Amplifier: 2x 15 Watt
Remote Control	RS-232C (9-pin D-sub) Input and Output; D-sub 15 and DVI-D (DDC/CI); Remote Control IR
Colour Versions	Black Front Bezel, Black Back Cabinet
Shipping Content	Display; VGA cable; Power Cable; Signal Cable 3,5 mm jack; CD-ROM (User Guides/Manuals)
Stand	Optional
Warranty	3 years warranty incl. backlight















The plasma display screen, also called "panel", is comprised of tiny image elements (cells). Although NEC manufactures these plasma displays with 99.99 % of their cells active, individual cells may occasionally produce no light or remain lit when they should have turned off. The brightness of a plasma display declines during the course of the unit's lifetime. Static images should not be displayed over a longer period of time, as this may cause phosphor burn on certain areas of the screen. Phosphor burn is not covered by the warranty. Please note our terms and conditions of our guarantee at www.nec-display-solutions.com.

PlasmaSync @ and OSM are registered trademarks of the NEC Corporation. Technical modifications excepted. Status: 07/10 and 0.00 are registered trademarks of the NEC Corporation. Technical modifications excepted. Status: 0.00 and 0.00 are registered trademarks of the NEC Corporation. Technical modifications excepted. Status: 0.00 are registered trademarks of the NEC Corporation. Technical modifications excepted trademarks of the NEC Corporation. Technical modifications excepted trademarks of the NEC Corporation. Technical modifications excepted trademarks of the NEC Corporation and the NEC Corporation are registered trademarks of the NEC Corporation and the NEC Corporation are registered trademarks of the NEC Corporation and the NEC Corporation are registered trademarks of the NEC Corporation and the NEC Corporation and the NEC Corporation are registered trademarks of the NEC Corporation and the NEC Corporation are registered trademarks of the NEC Corporation and the NEC Corporation are registered trademarks and the NeC Corporati

www.nec-display-solutions.co.uk